



7660 Series

Automatic Parts Washers

North America's #1 Name in High-Pressure Cleaning Systems

Front-Load Models

4-hook parts tree (standard) allows parts to be hung for total cleaning coverage



7660 Series models include oil drain container, small parts basket, parts tree and containment ring

Control panel includes 0 to 60- minute wash timer, 0 to 12-hour heater timer, oil-skimmer on/off switch and turntable on/off switch

Alert light for low-water shutoff that protects heating element in case water level drops



Intermediate spray bar adjusts for vertical or horizontal cleaning positions without tools. Shown with standard small parts basket and containment ring



Recessed base provides ample foot clearance for easy loading and unloading



Built-in oil skimmer and oil drain container removes oil from cleaning solution in sump

Sump level gauge permits water level to be monitored externally



Sump access panels make for easier sump clean-out



Easy access debris screen prevents foreign objects and small parts from falling into sump

Heavy-duty wheels for easy moving within the shop and convenience in disposing wastewater

Double-pitched sump floor and front access drain cap permit total flushing

Thermostatically controlled heater maintains optimum cleaning temperature

FEATURES

- Vertical Seal-less Pump: 5HP, 110 GPM @ 50 PSI
- 750-Pound Load Capacity
- 65-Gallon Sump Capacity
- 9 kW Heater
- Available in Stainless Steel



All Hotsy Automatic Parts Washers are designed for safe, aqueous cleaning

7660 SERIES Front-Load Automatic Parts Washers


■ 750-Pound Load Capacity ■ 230V, 1 or 3 PH; 230V, 460V or 575V, 3PH ■ 65-Gallon Sump Capacity ■ Available in Stainless Steel

An Automatic, Cost-Effective Parts Cleaning Solution

Efficient and solvent-free automatic parts cleaning

Say goodbye to dirty, time-consuming manual cleaning with a Hotsy 7660 Series Front-Load Automatic Parts Washer. That means trained technicians can concentrate on more productive work. Hotsy's automatic parts washers combine hot water and modern detergents to give you cleaning action that's far more powerful than any solvent.

Ask your Hotsy Rep for details on the **EXTENDED 1-YR LABOR WARRANTY** with exclusive use of Hotsy Detergents!

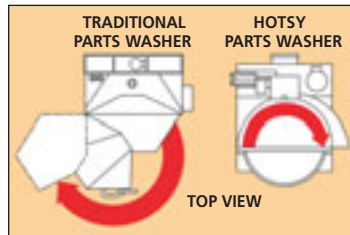

Hotsy's unique internal roll-away door saves floor space and prevents wash water from dripping on the shop floor

Clean better with Hotsy TubMate detergents

Hotsy offers biodegradable TubMate detergents to give you a total parts-washing solution. TubMate detergents are specially formulated to give you the best cleaning action at temperatures as low as 110°F, which means significant savings in energy costs. TubMate detergents contain a blend of rust and corrosion inhibitors to help protect your machine and parts.



Hotsy TubMate detergents are environmentally safe to use because they contain no caustic soda, caustic potash, phenolics, chlorinated solvents or heavy metals. And since they're highly concentrated, a little goes a long way.

SPECIFICATIONS

MODEL	WORKING HEIGHT	TURNTABLE DIAMETER	VOLT/PH	AMPS	SHIP WT (lbs)
7660	50"	30"	230/1	52	929
7662	50"	30"	230/3	36	929
7663	50"	30"	460/3	17	929
7664	50"	30"	575/3	14	929
7662-SS	50"	30"	230/3	36	929
7663-SS	50"	30"	460/3	17	929
7664-SS	50"	30"	575/3	14	929
7662R	50"	30"	230/3	36	929
7663R	50"	30"	460/3	17	929
7664R	50"	30"	575/3	14	929
7662R-SS	50"	30"	230/3	36	929
7663R-SS	50"	30"	460/3	17	929
7664R-SS	50"	30"	575/3	14	929

R=Rinse, SS= Stainless Steel Dimensions: 88"H x 47" W x 53"D

Spend some time with a Hotsy Expert

Hotsy has more than 130 local distributors in North America, all factory-trained to properly evaluate your parts cleaning needs. Over 80% of Hotsy's distributors have been supporting Hotsy systems for more than 20 years.

This seasoned network of local service professionals will ensure you get the safest, most effective and most efficient cleaning solution to your specific cleaning need.



hotsy Nothing Cleans Like a Hotsy!

Tel: (800) 525-1976 Fax: (888) 880-9631
www.Hotsy.com email: info@Hotsy.com



P/N 97-03642 Effective 3/05 Specifications and product descriptions subject to change without notice. ©2005 Hotsy

NOTE: We are constantly improving and updating our products. Consequently, pictures, features & specifications in this brochure may differ slightly from current models. Flow rates & pressure ratings may vary due to variances allowed by manufacturers of our machine components. We attempt to keep our machine performance within ± 5% of listed specifications.

OPTIONS for 7660 SERIES

- **Detail Brush** (with pump) allows easy cleaning of blind holes and difficult areas (requires shop air)
- **Power Brush** (pneumatic) removes stubborn gasket materials and carbon deposits (requires shop air)
- **Detail and Power Brush** (complete kit)
- **Height Extension** (factory installed) provides an extra 6-inches height in the wash area
- **Filtration & Sump Sweep** quickly removes sediment from the sump floor through 100 or 200 GPM filters to help extend the life of wash water
- **Two-Tier Turntable** adds second turntable for greater capacity
- **Heater & Skimmer Timers** (24 hour / 7 day)
- **Automatic Water Fill** automatically adds water if water level drops
- **Hour Meter** displays elapsed time
- **60 Mesh Debris Screen Tray Insert** provides more thorough screening of sump solution
- **Rubber Turntable Mats** to protect parts being cleaned
- **Swivel Casters** for shop portability
- **30" Containment Ring** for extra basket capacity
- **Touch-up Paint** spray can
- **Wastewater Drum Evaporator** is ideal for eliminating very low volumes of wastewater for drying sludge

A Hotsy APW for every application

Whether the parts you're cleaning are big or small, wide or narrow, heavy or lightweight, Hotsy has a top-load, front-load, conveyor or manual parts washer to meet your parts cleaning needs.

Hotsy Cleaning Systems, Inc

DES MOINES, IOWA
3100 101 St
Urbandale, IA 50322
Phone: (515) 278-8800
Toll free: (800)798-8800
Fax: (515) 278-1158

CEDAR RAPIDS, IOWA
1020 N 15 Ave.
Hiawatha, IA 52233
Phone: (319) 378-8400
Toll free: (800) 555-1357
Fax: (319) 378-0511